


CEマーキング仕様パワーモータ配線 Power Moller wiring conforming to CE marking

標準 Standard Unit


<3相><3-PHASE>

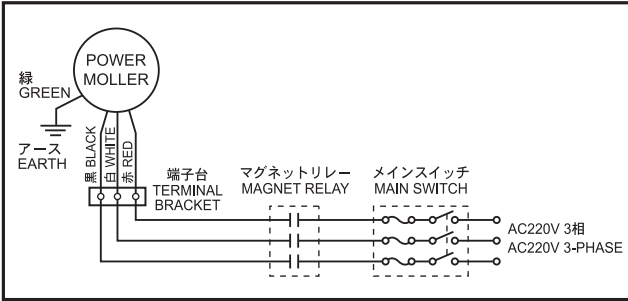

対応機種 (Applicable models)

PM380AS, PM380AU, PM427AS, PM427AU, PM486BS, PM486BU, PM500BS, PM500BU, PM570AS, PM570BP, PM570AU, PM605AS, PM605BP, PM605AU, PMT42YS, PMT42AS, PMR42BS, PM763BS, OR-F, OR-G, IP-G

<単相><1-PHASE>

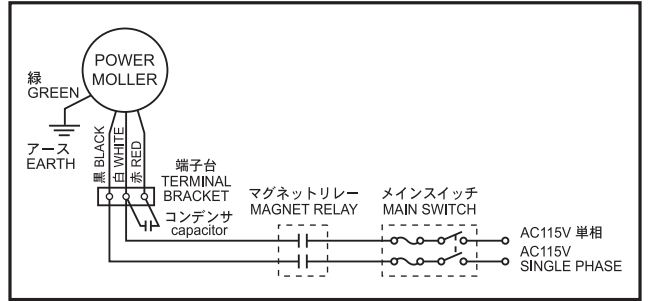


対応機種 (Applicable models)

PM380AS, PM427AS, PM486BS, PM500BS, PM570AS, PM605AS, PMT42YS, PMT42AS, PMR42BS

ブレーキ内装仕様 Unit with Built-in brake option

<3相><3-PHASE>

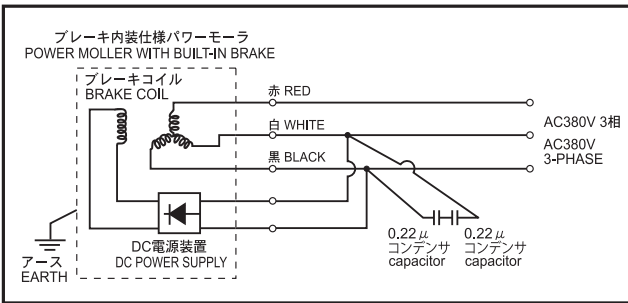


対応機種 (Applicable models)

PM486BS, PM500BS, PM570AS, PM570BP, PM605AS, PM605BP

- 240V 以下は 0.22 μ コンデンサが 1 つです。
- Motor voltage rating 240V or less requires only one 0.22 μ capacitor for wiring.

<単相><1-PHASE>

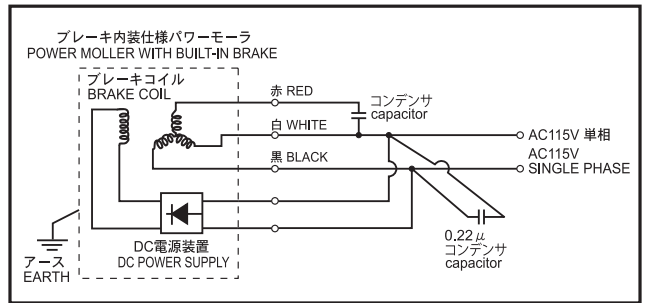


対応機種 (Applicable models)

PM486BS, PM500BS, PM570AS, PM605AS

電磁式フリークラッチ仕様 Free Clutch option

<3相><3-PHASE>

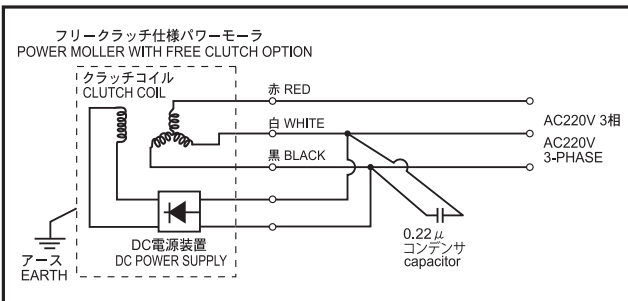


対応機種 (Applicable models)

PM570AS, PM570AU, PM605AS, PM605AU

- 240V 以下は 0.22 μ コンデンサが 1 つです。
- Motor voltage rating 240V or less requires only one 0.22 μ capacitor for wiring.

<単相><1-PHASE>

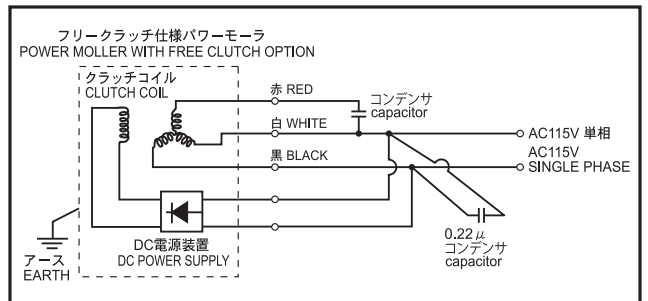

対応機種 (Applicable models)

PM570AS, PM605AS